


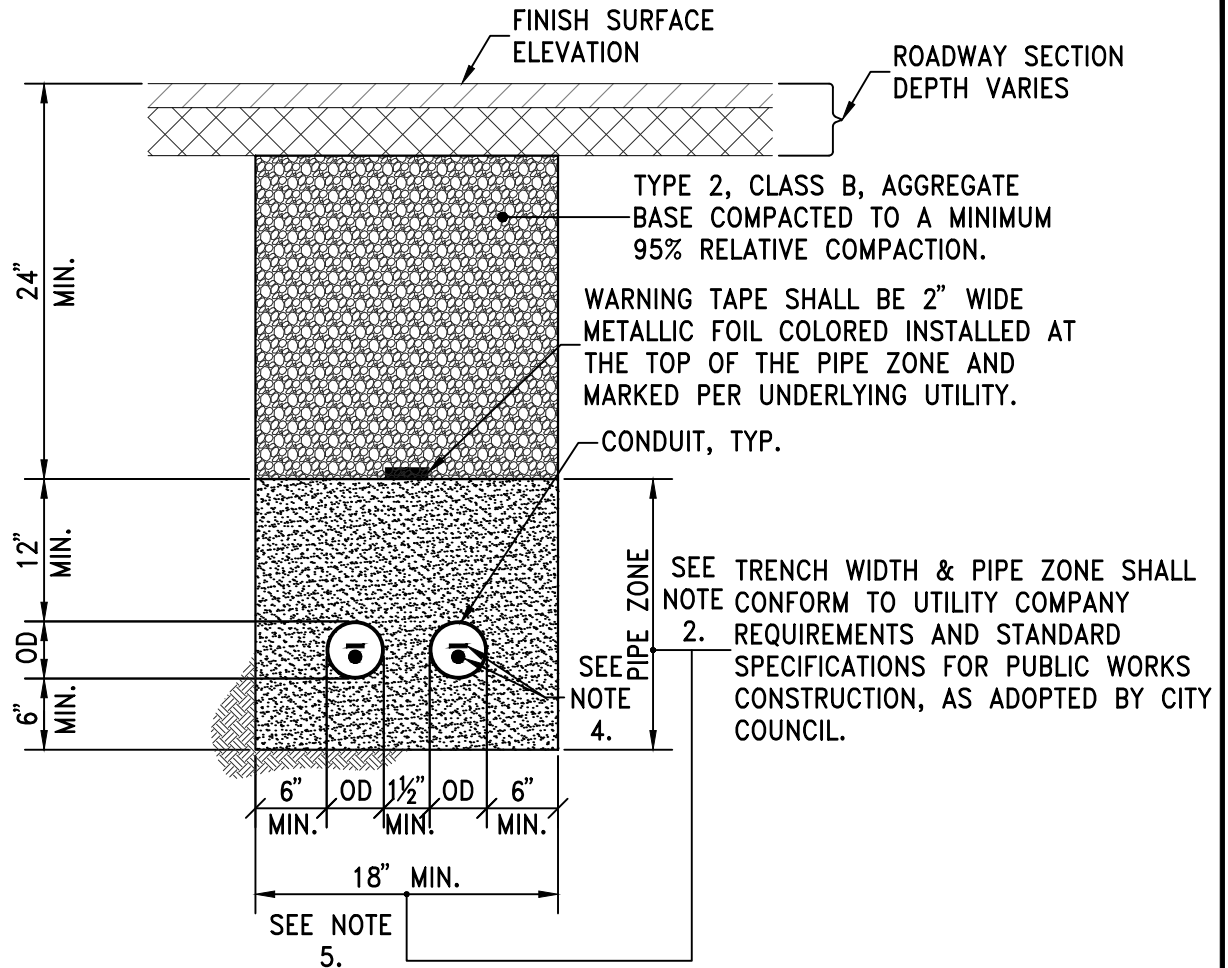

NOTES:

1. ALL MATERIALS AND INSTALLATION PROCEDURES SHALL BE IN ACCORDANCE WITH STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION (SSPWC), AS ADOPTED BY CITY COUNCIL.
2. BEDDING MATERIAL SHALL CONFORM TO OWNING-UTILITY COMPANY REQUIREMENTS AS APPROVED BY THE CITY OF SPARKS. FOR CITY OWNED TRAFFIC AND LIGHTING UTILITIES, BEDDING MATERIAL SHALL BE CLASS A. COMPACTED TO MINIMUM 90% RELATIVE COMPACTION. MATERIALS SHALL CONFORM TO SSPWC SECTION 200.
3. CEMENT SLURRY BEDDING/BACKFILL SHALL NOT BE USED.
4. INSTALL LOCATE WIRE AND MULE TAPE FOR ALL FUTURE, UNUSED, OR FIBER-OPTIC CONDUITS. LOCATE WIRE SHALL BE 12 GAGE WIRE TERMINATED AT BOX & POLYESTER PULLING TAPE SHALL BE MULE TAPE OR APPROVED EQUAL.
5. ALL EXCAVATIONS SHALL CONFORM TO THE LATEST O.S.H.A. REQUIREMENTS.

STANDARD DETAILS FOR PUBLIC WORKS CONSTRUCTION

DRAWING No.



TRAFFIC & LIGHTING CONDUIT TRENCH

S-404

APPROVED BY: JE DATE: 1/2020