


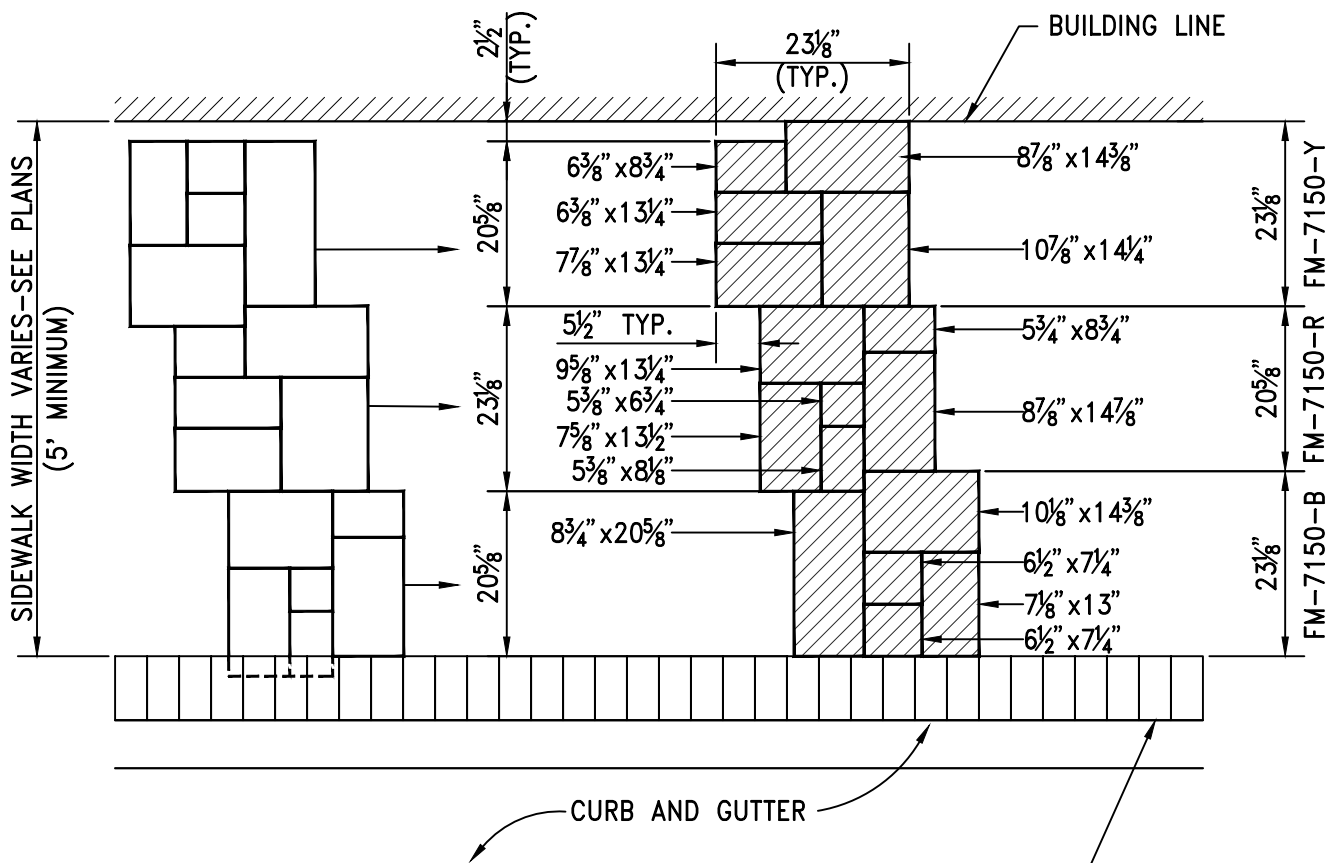

NOTES:

1. DIMENSION TOLERANCES:

- A. LENGTH $-\frac{1}{4}'' \pm \frac{1}{8}''$
- B. WIDTH $-\frac{3}{8}'' \pm \frac{1}{8}''$
- C. DEPTH $-\frac{1}{4}'' \pm \frac{1}{8}''$

2. SIZES OF DESIGN AT END/EDGE VARY AND/OR ADJUSTED TO FIT THE LENGTH AND WIDTH OF SIDEWALK, AND WILL REQUIRE HAND TOOLING.

3. THE ASHLAR SLATE STAMPED PATTERN SHALL BE "BRICKFORM RAFCO" OR APPROVED EQUAL

4. PATTERN DESCRIPTION: PATTERN IS FORM OF RECTANGULAR STONES IN VARIOUS SIZES LAID IN A RANDOM MANNER. THE SIDES OF THE STONES VARY FROM $5 \frac{1}{4}''$ TO $20 \frac{5}{8}''$. EDGES ARE BEVELED FORMING A V-SHAPE GROOVE WITH THE APPEARANCE OF UNGROUTED JOINT, $\frac{1}{2}''$ WIDE AND $\frac{1}{4}''$ DEEP. OUTER BEVELED EDGES ARE $\frac{1}{4}''$ WIDE WHICH MATCH THE INSIDE JOINTS WHEN STAMPS ARE JOINED. THE COMPLETED PATTERN IS FORMED BY THE USE OF 3 STAMP FORMS, B, R AND Y, EACH WITH DIFFERENT RANDOM ARRANGEMENT OF STONES.

STANDARD DETAILS FOR PUBLIC WORKS CONSTRUCTION

DRAWING No.



STAMPED CONCRETE

S-104A

APPROVED BY: JE | DATE: 1/2020