


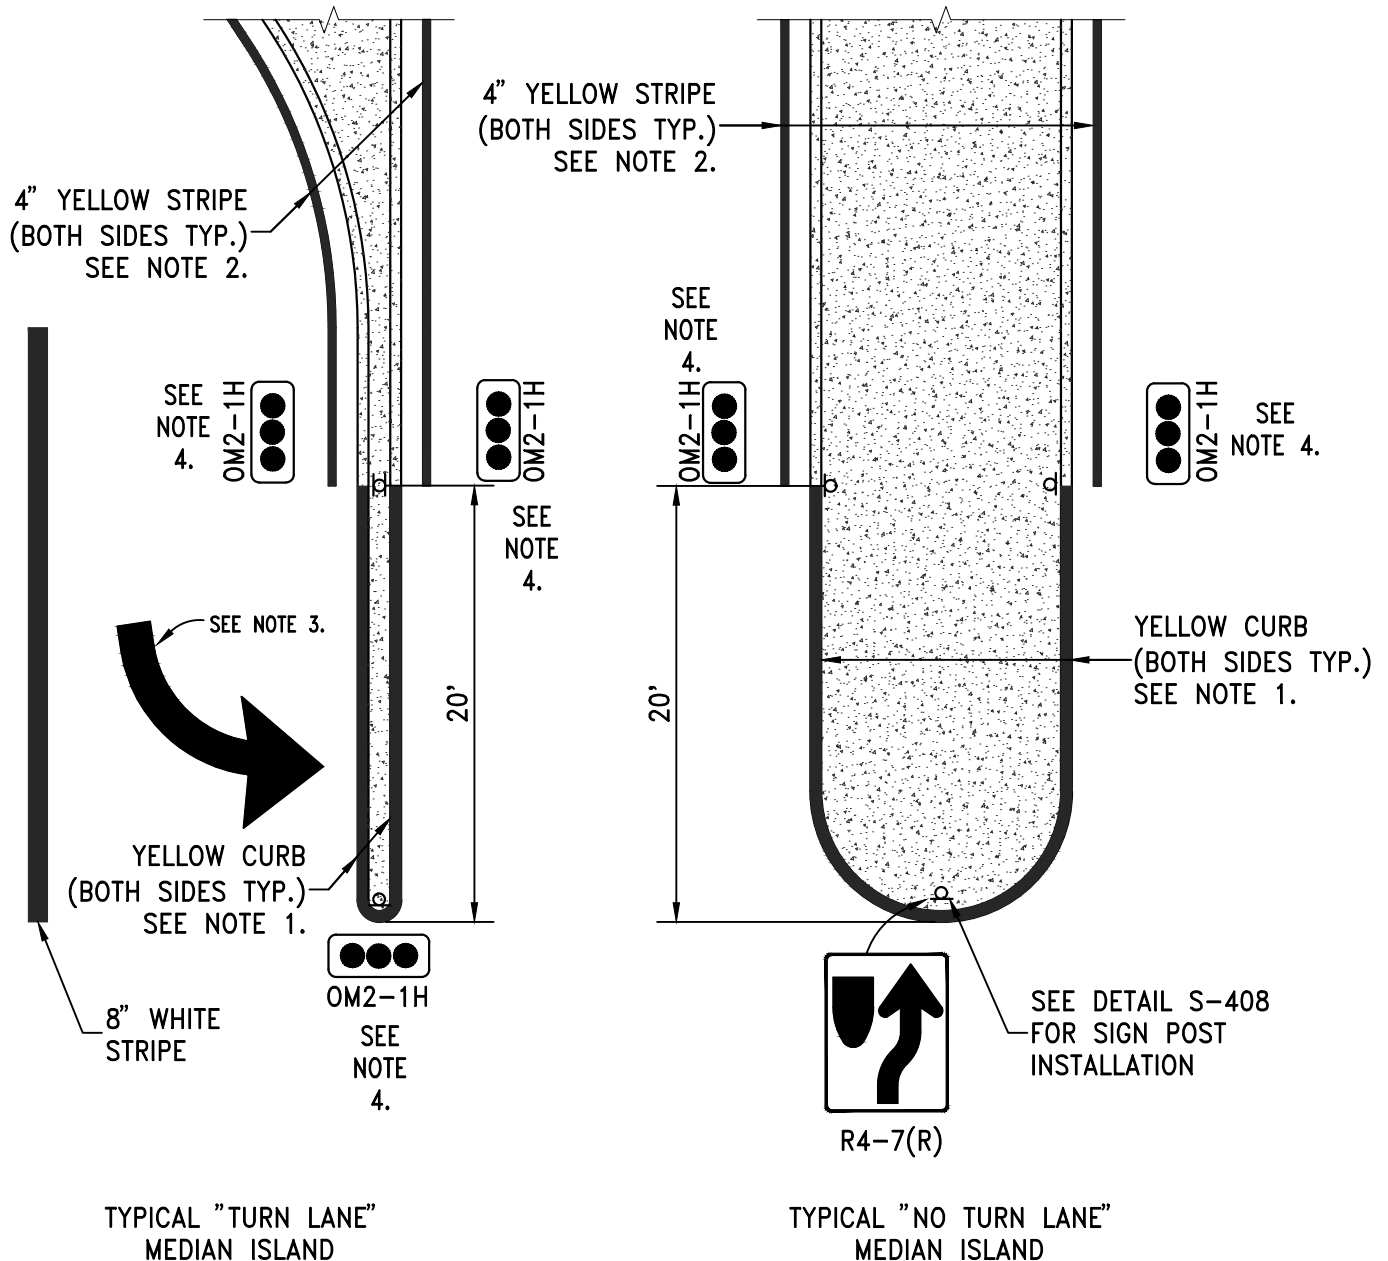

NOTES:

1. SHALL BE PAINTED WITH GLASS BEADS FULL HEIGHT AND TOP OF CURB.
2. 4" YELLOW STRIPE SHALL BE 1' FROM FACE OF CURB.
3. PAVEMENT MARKING ARROW(S) AND "ONLY" AS REQUIRED.
4. GUIDEPOST IN MEDIAN AREAS SHALL BE "SAFE HIT" OR APPROVED EQUAL, 8" CONCRETE ANCHOR WITH FLEXIBLE TYPE 2 GUIDEPOST.
5. ALL WORK SHALL CONFORM TO THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (M.U.T.C.D.), AND A POLICY ON GEOMETRIC DESIGN OF HIGHWAYS AND STREETS (GREEN BOOK).

STANDARD DETAILS FOR PUBLIC WORKS CONSTRUCTION

DRAWING No.



MEDIAN ISLAND TRAFFIC CONTROL

S-410

APPROVED BY: JE DATE: 1/2020