


NEENAH DRAINAGE GRATE R-4380
OR R-4385, D&L C-1012, OR
APPROVED EQUIVALENT.

NEENAH DRAINAGE GRATE R-4351
(BEEHIVE) MAY BE USED IN
LANDSCAPE AREAS.

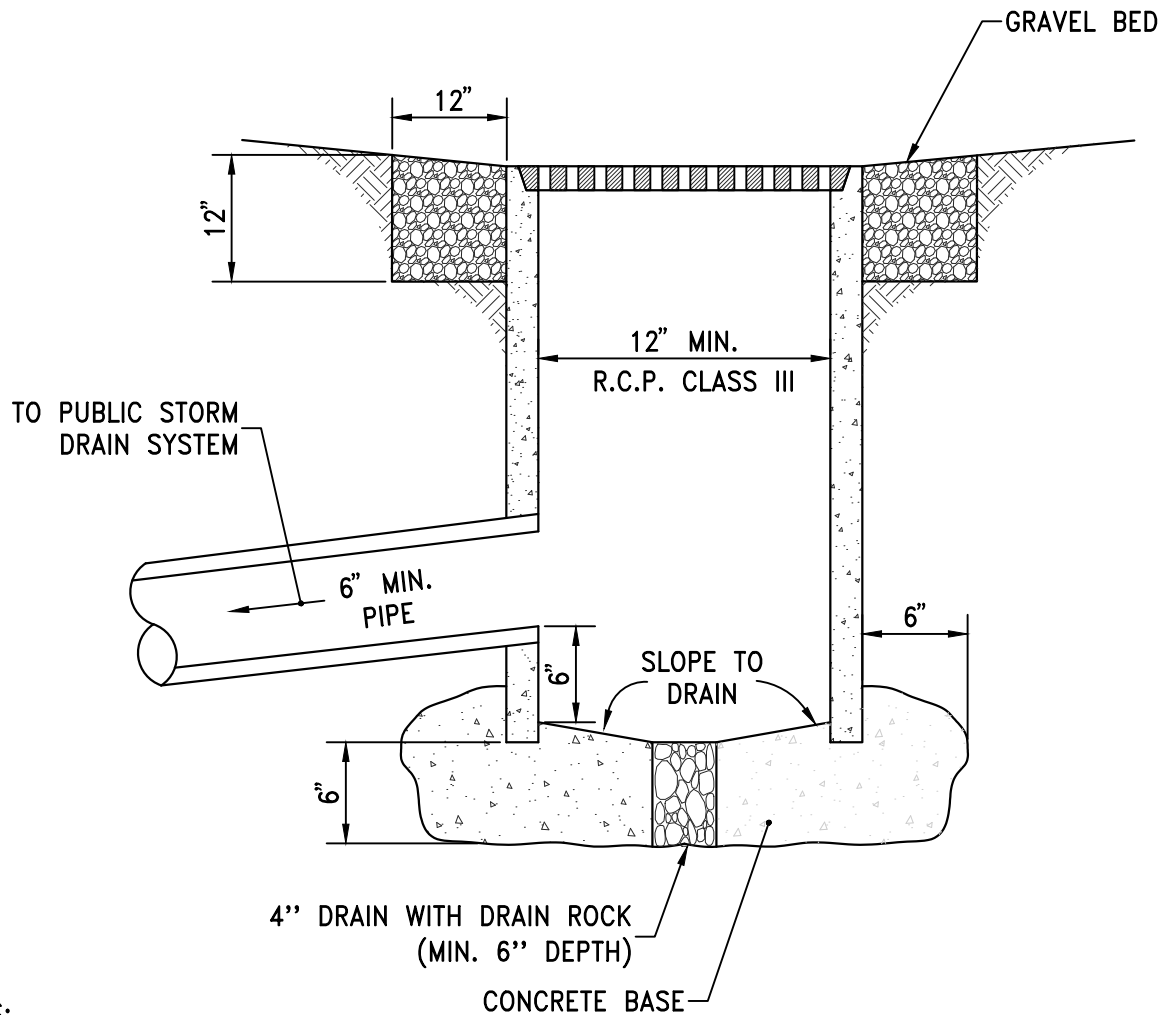

NOTES:

1. YARD DRAIN BASE SHALL BE PORTLAND CEMENT CONCRETE (P.C.C.) AND SHALL HAVE THE FOLLOWING CHARACTERISTICS: 3000 PSI MIN. COMPRESSIVE STRENGTH AT 28 DAYS, MIN. 6 SACKS OF CEMENT PER CUBIC YARD WITH A SLUMP AT 1 TO 4 INCHES. ALL MATERIALS SHALL CONFORM TO SSPWC SECTION 202, AS ADOPTED BY CITY COUNCIL.
2. TO BE OWNED AND MAINTAINED BY PRIVATE DEVELOPMENTS ONLY. NOT TO BE USED IN DRIVEWAYS OR WHERE DRAINAGE ORIGINATES FROM AREAS USED FOR VEHICULAR TRAFFIC.
3. ALL CATCH BASINS, PUBLIC OR PRIVATE, SHALL BE PROVIDED WITH A "SUR-TRAP" OIL/WATER SEPARATOR OR APPROVED EQUAL.
4. 12 INCH WIDE GRAVEL BED AROUND GRATE. NOMINAL AGGREGATE SIZE SHALL BE GREATER THAN GRATE OPENING.
5. SHALL NOT BE USED IN PUBLIC RIGHT-OF-WAY UNLESS OTHERWISE APPROVED BY CITY ENGINEER.

STANDARD DETAILS FOR PUBLIC WORKS CONSTRUCTION

DRAWING No.



**PRIVATE
YARD DRAIN**

S-202

APPROVED BY: JE DATE: 1/2020